

SANIFLOOR® 1
With shower waste for
tiled floor - Height 68mm



SANIFLOOR® 2
With shower waste for
vinyl floor - Height 68mm



SANIFLOOR® 3
With shower waste for
trays - Height 57mm

Designed specifically where floor drainage is required but where space underneath is very limited e.g. wet rooms.



3 m
30 m



This two part kit composed of a powerful shower waste pump and a choice of three gully models can pump up to 3m vertically as well as 30m horizontally. Higher flow rate means it can be used with powerful 'rain head' showers.

TECHNICAL DATA



Maximum flow rate	30 L/min at 1 m
Vertical and horizontal discharge	3 m / 30 m
IP rating	IP 44
Discharge pipe diameter	Ø ext. 32 mm
Weight	SANIFLOOR +1: 8.6 kg SANIFLOOR +2: 8.2 kg SANIFLOOR +3: 8 kg
Non-return valve included	

MOTOR DATA


Electrical power supply	220-240 V / 50-60 Hz
Electrical power rating	400 W
Maximum current input	1,7 A
Electrical class	I
Thermally protected	
Automatic activation	Float and ILS system

MATERIALS

Motor body	Polyamide
Pump cover plate	Polyamide
Impeller	Noryl
Motor shaft	Stainless steel
O-Ring	Nitrile
Sealing ring	Nitrile

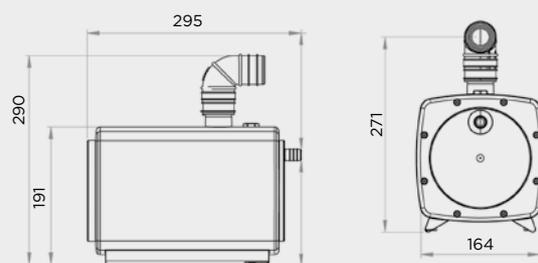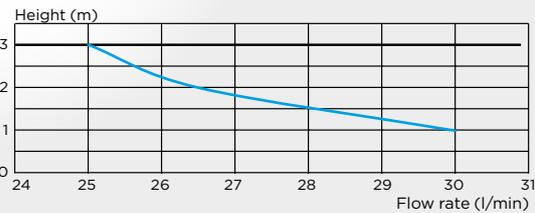

Installation diagram



Maximum vertical distance between pump and gully : 30 cm